

ICI-DP HH500-15 set

NEW



Delivery content

- | | |
|--------------------|----------------------------|
| 1x ICI-DP HH500-15 | 1x BPS 204 |
| 1x BPS 204-Client | 1x HV FI-FI mini 1 m, 高压电缆 |
| 1x SK FI-FI 7P 1 m | 4x SMA-SSMB 1 m |
| 1x NT FRI EU 24V | 1x USB-AB |
| 1x ICI-DP case | 1x ICI-DP m |
| 1x BPS 204 m | |

Technical parameters


探头尺寸	Ø 500 µm
脉冲参数	
上升时间	< 2 ns
	25 ns (200 V)
极性 (set by software)	+/-
电压	50 - 1000 V
max. Jitter (typ.)	± 1 ns
Min. trigger pulse delay	35 ns

ICI-DP HH500-15 set

Contents of the case ICI-DP HH500-15 set




Schematic set-up with mover

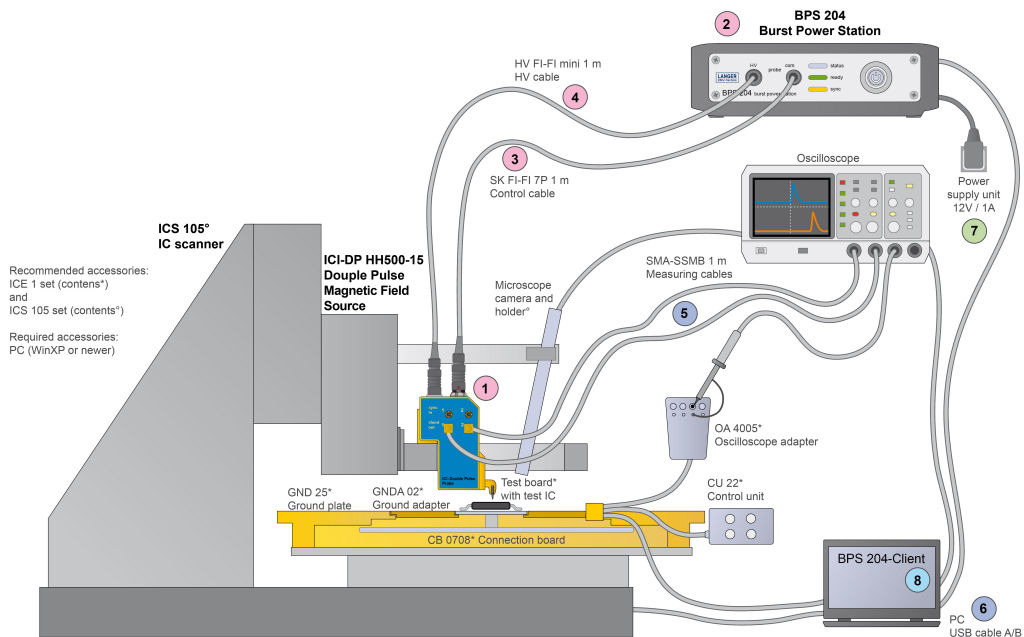

ICI-DP HH500-15 set

Fault injection measuring station with Langer IC scanner

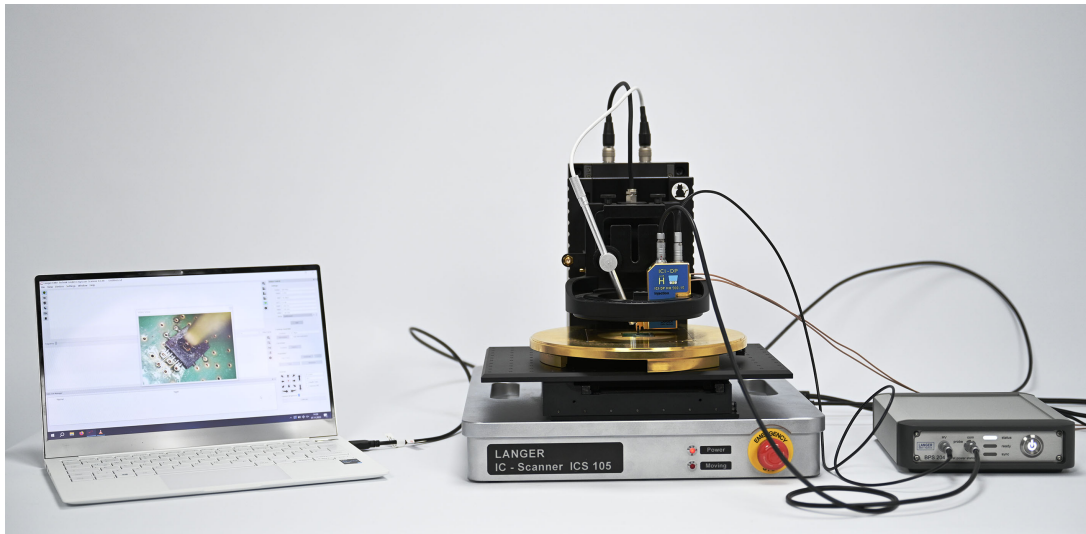

Scope of delivery

