

# A300-2 set

Optical Fiber Probe 2-Channel, 5 MHz



## Short description

The A300-2 set consists of two sensors, which allow for displaying oscilloscopically analog signals under EFT/ESD/RF interference potential free. Disturbed signals can be easily detected. In the device under test the sensor transforms the measured logic signals into optical signals. The optical signals are transmitted via a fiber optical cable to the optical receiver which transforms them into electrical signals. These can be presented with an oscilloscope or can be used for controlling other devices. The system is suitable for monitoring signals or devices under test in an anechoic chamber or for EMC optimizing of hard- and software.

For signal detecting within the device under test several sensor types AS 300 or AS 350 with different measuring ranges are available.

## Scope of delivery

- 2x AE 300, Optical Receiver
- 2x AS 300, Optical Sensor, Analog  $\pm 10$  V DC
- 2x LWL  $\varnothing 2.2$  mm 6 m, Optical Fiber, Single 6 m
- 1x NT FRI EU, Power Supply Unit
- 1x A300-2 acc, Accessories
- 1x A300-2 case, System Case
- 1x Analog m, User Manual

# A300-2 set

Optical Fiber Probe 2-Channel, 5 MHz


## Technical parameters

<b>Bandwidth</b>	DC ... 5 MHz
<b>Sampling rate</b>	12.5 Msps
<b>Resolution</b>	10 Bit
<b>AE 300 Optical Receiver</b>	
Bandwidth	DC ... 5 MHz
Voltage range - output	±1 V
Optical input: Optical fiber	Ø 2.2 mm
Supply voltage	12 V ... 16 V
Current input	≈ 90 mA
<b>AS 300 Optical Sensor</b>	
Bandwidth	DC ... 5 MHz
Sampling rate	12.5 Msps
Measuring range	± 10 V
Input resistance	100 kΩ
Radiated immunity	> 200 V/m
Supply voltage	4.5 V ... 16 V
Current input	70 mA (4.5 V) 30 mA (16 V)
<b>Optical fibre length</b>	1 m ... 20 m

# A300-2 set

Optical Fiber Probe 2-Channel, 5 MHz

## Application with A300 set

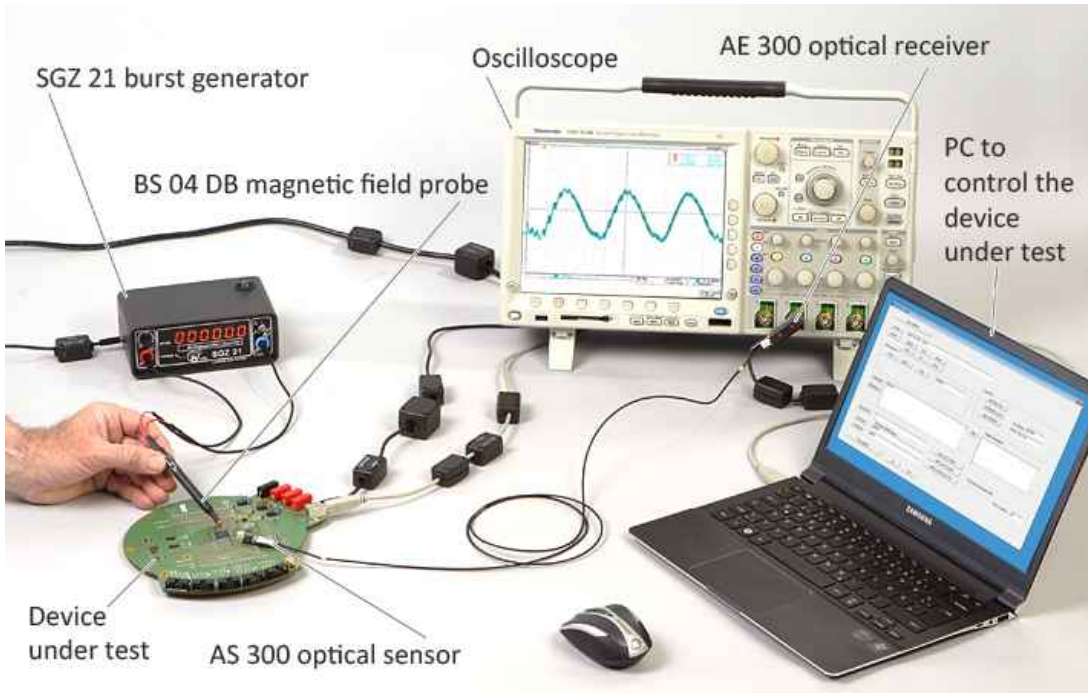

## Application with optical sensor AS 300



# A300-2 set

Optical Fiber Probe 2-Channel, 5 MHz

Scope of delivery A300-2 set

