

OB 100 set



Delivery content


- 2x OB 100
- 1x CAN 100, 光纤探头 CAN现场总线
- 4x Adapter Socket, 4-poles
- 1x LIN 100, 光纤探头
- 4x Adapter Socket, 3-poles
- 1x LWL double 10 m, 10m 双通道光纤
- 1x Wire CuL, 镀铜电线卷
- 1x NT Ex EU
- 1x OB 100 set m
- 1x A4 case

OB 100 set

Technical parameters

| | |
|--|---|
| Operating time with charged internal batteries | up to 1 week (depending on operating mode) |
| Supply voltage | 12 V (max. 25 V) |
| max. current input at 12 V | 250 mA (while charging internal battery) 45 mA (without charging internal battery) |
| 光纤接口 | 2 x 2.2 mm Ø |
| 光线长度 | 20 m (6 m at 1 Mbit/s CAN) |

Application of OB 100 set

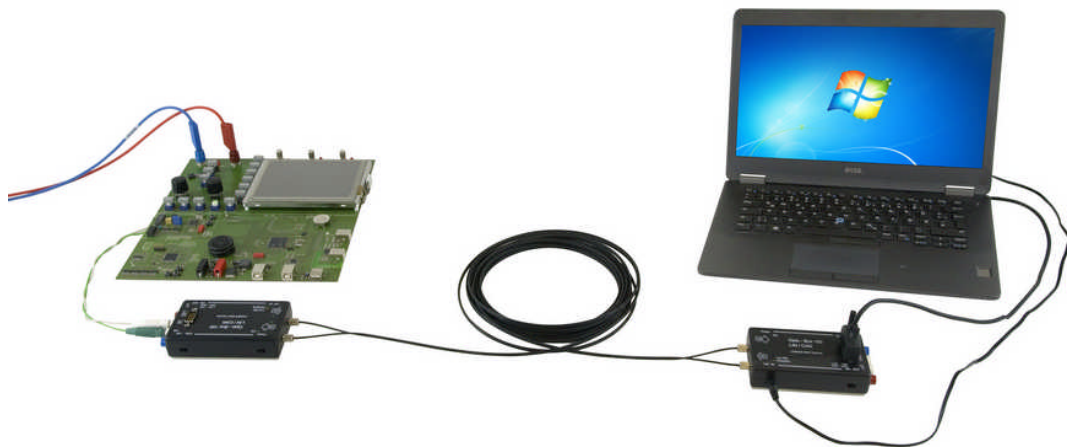

OB 100 set

Scope of delivery OB 100 set

