

OB 100 set



Delivery content


- 2x OB 100
- 1x CAN 100, 光纤探头 CAN现场总线
- 4x adapter socket, 4-poles
- 1x LIN 100, 光纤探头
- 4x adapter socket, 3-poles
- 1x LWL double 10 m, 10m 双通道光纤
- 1x Wire CuL, 镀铜电线卷
- 1x NT Ex EU
- 1x OB 100 set m
- 1x A4 case

OB 100 set

Technical parameters

Operating time with charged internal batteries	up to 1 week (depending on operating mode)
Supply voltage	12 V (max. 25 V)
max. current input at 12 V	250 mA (while charging internal battery) 45 mA (without charging internal battery)
光纤接口	2 x 2.2 mm Ø
光线长度	20 m (6 m at 1 Mbit/s CAN)

Application of OB 100 set

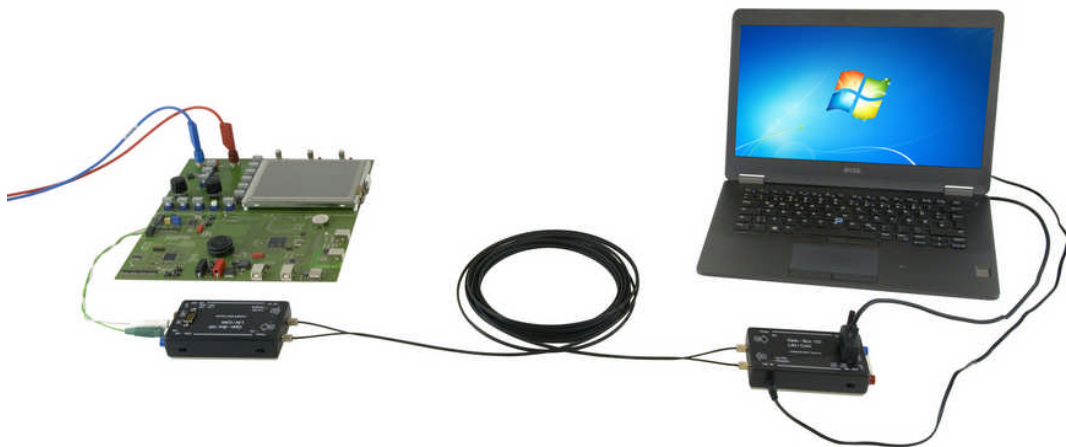

OB 100 set

Scope of delivery OB 100 set

