

RF4-E set

Near-Field Probes E-field 30 MHz up to 3 GHz



Short description

The RF4-E probe set contains two passive E field probes to measure electrical fields with a frequency range from 30 MHz up to 3 GHz for comparison purposes.

The probes are designed for the analysis of E field distributions, detection of coupling mechanisms on modules and evaluation of switching edges on signal leads and RF voltages of the supply system.

The near-field probes are small and handy. They have a current attenuating sheath and, therefore, are electrically shielded. The near-field probes can be connected to a spectrum analyzer or an oscilloscope with a 50 Ω input. They do not have an internal terminating resistance.

Scope of delivery

- 1x RF-E 02, E-Field Probe 30 MHz up to 1.5 GHz
- 1x RF-E 05, E-Field Probe 30 MHz up to 3 GHz
- 1x SMB-BNC 1 m, SMB-BNC Measurement Cable
- 1x Case 2, System Case Near Field Probes for 2 Probes

Technical parameters


| | |
|-----------------|------------------|
| Frequency range | 30 MHz ... 3 GHz |
| Connector | SMB, male, jack |

RF4-E set

Near-Field Probes E-field 30 MHz up to 3 GHz



Application RF-E05

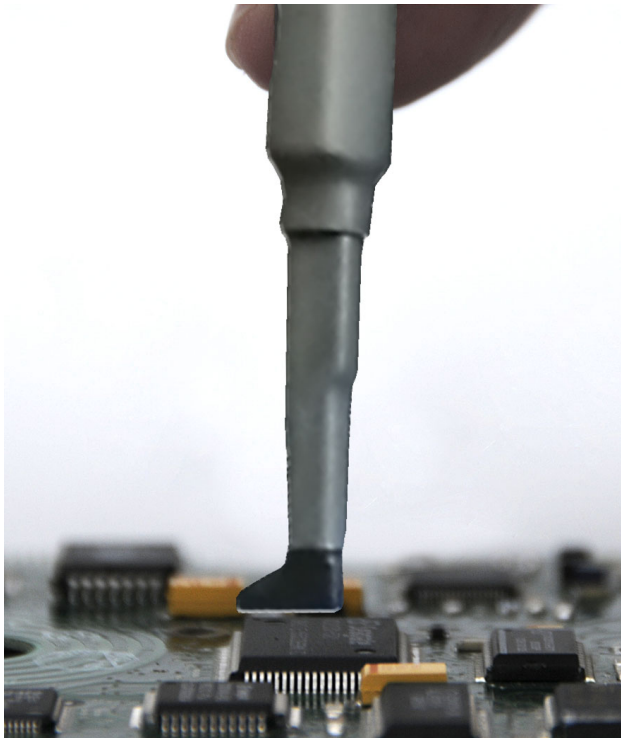

Measurement set-up near-field probes

