

ICI-DP HH250-15 set

Double Pulse Magnetic Field Source set

LANGER
EMV-Technik



Short description

The set ICI-DP HH250-15 set is designed to inject electromagnetic pulses with high temporal and spatial resolution into safety critical circuits (electromagnetic fault injection - EMFI). This set can be used to generate single pulses as well as a double pulse sequence with a pulse following time of minimum 25 ns. The set includes the high voltage source BPS 204 as well as the probe ICI-DP HH250-15.

Via the sync inputs of the probe or the BPS, the pulses can be synchronized to an external function sequence.

Parameters such as pulse voltage and polarity can be set via software.

Scope of delivery

1x ICI-DP HH250-15, Double Pulse Magnetic Field Source

1x BPS 204-Client, BPS 204-Client Software

1x SK FI-FI 7P 1 m, Control Cable, Fischer-Fischer

1x NT FRI EU 24V, Power Supply Unit

1x ICI-DP case, System case

1x BPS 204 m, BPS 204 User Manual

1x BPS 204, Burst Power Station

1x HV FI-FI mini 1 m, High-Voltage Cable, Fischer-Fischer

4x SMA-SSMB 1 m, SMA-SSMB Measuring Cable

1x USB-AB, USB Cable Type A-B

1x ICI-DP m, ICI-DP set User Manual

Technical parameters

Probe head dimensions:	Ø 250 µm
Pulse parameter	
Rise time	2 ns
Min. double pulse sequence time	25 ns (200 V)
Polarity (set by software)	+/-
Voltage	50 - 1000 V
max. Jitter (typ.)	± 1 ns
Min. trigger pulse delay	35 ns


ICI-DP HH250-15 set

Double Pulse Magnetic Field Source set

Contents of the case ICI-DP HH250-15 set



Schematic set-up with mover

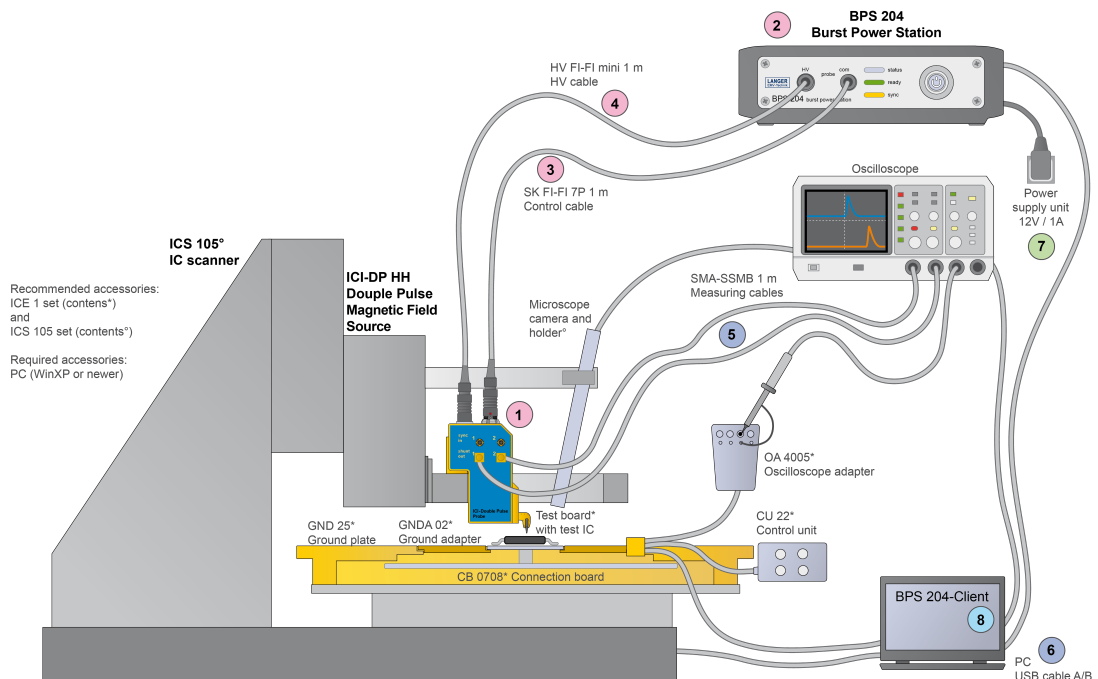


ICI-DP HH250-15 set

Double Pulse Magnetic Field Source set

LANGER
EMV-Technik

Fault injection measuring station with Langer IC scanner

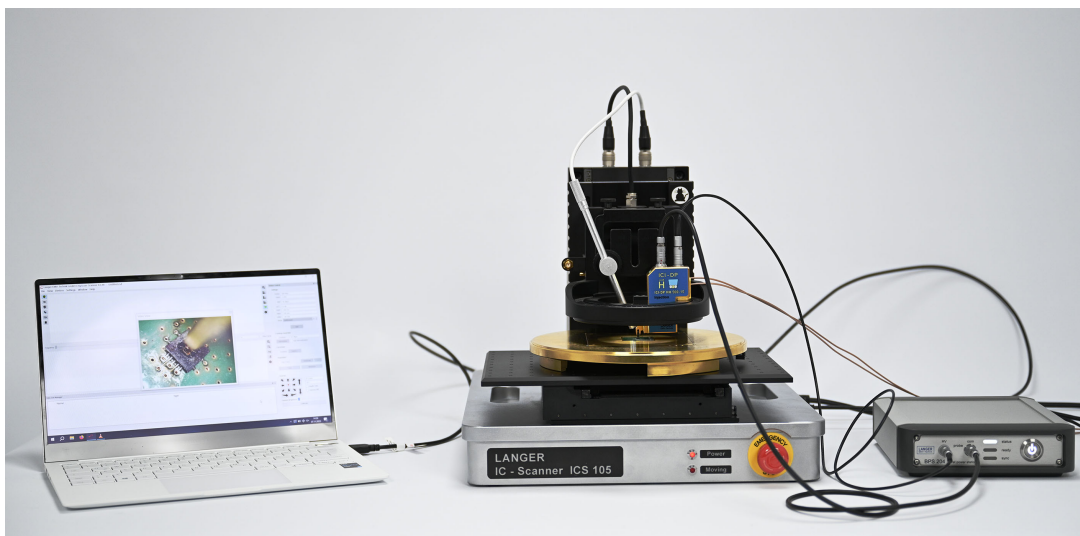

Scope of delivery

