


### Short description

The BS 05D generates a B field with a diameter  $> 3$  mm. The field lines run at  $90^\circ$  to the field source. The field source is specially suitable for localizing weak spots between two printed circuit boards and in hard to reach spots of assemblies, e.g. between components. Before using the BS 05D, the weak spot should be roughly localized with the BS 02 or BS 04BD field source.

### Measuring principles

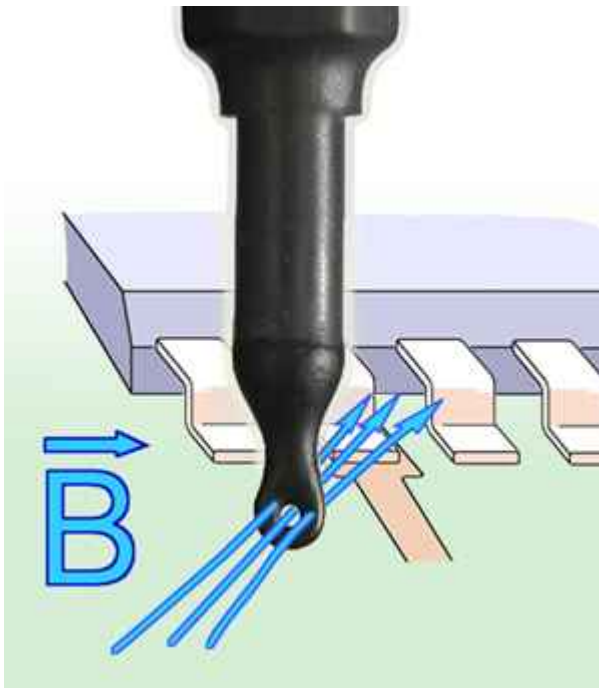

# BS 05D

Magnetic Field Source

Application BS 05D

