


# RF-E 04

E-Field Probe 30 MHz up to 3 GHz

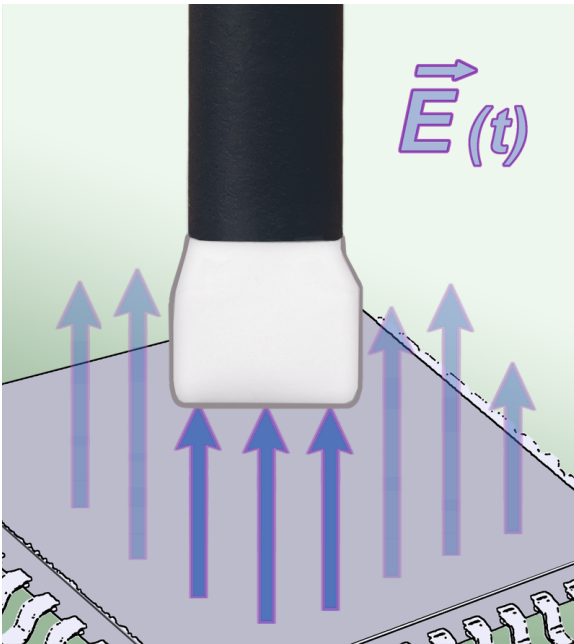

## Short description


The electrode on the underside of RF-E 04 probe head detects electrical fields which are decoupled by clocked lines and ICs. The resolution of the probe allows for measurements with a distance from 0,5 to 10 mm above the assembly. The RF-E 04 probe was developed for Langer scanner.

The RF-E 04 is a passive near-field probe. In principle it has the same structure as the RF-E 03 and RF-E 09 probes. With its small square electrode surface, the specific source of the electrical interference field can be detected. When measuring, the E-field probe is held above or positioned onto components and printed circuit boards. The near-field probe is small and handy. The upperside is electrically shielded. It has a current attenuating sheath and, therefore, is electrically shielded. It can be connected to a spectrum analyzer or an oscilloscope with a 50  $\Omega$  input. The E-field probe does not have an internal terminating resistance of 50  $\Omega$ .

## Technical parameters

|                       |                           |
|-----------------------|---------------------------|
| Frequency range       | 30 MHz ... 3 GHz          |
| Probe head dimensions | $\approx (5 \times 5)$ mm |
| Connector             | SMB, male, jack           |


## Frequency response

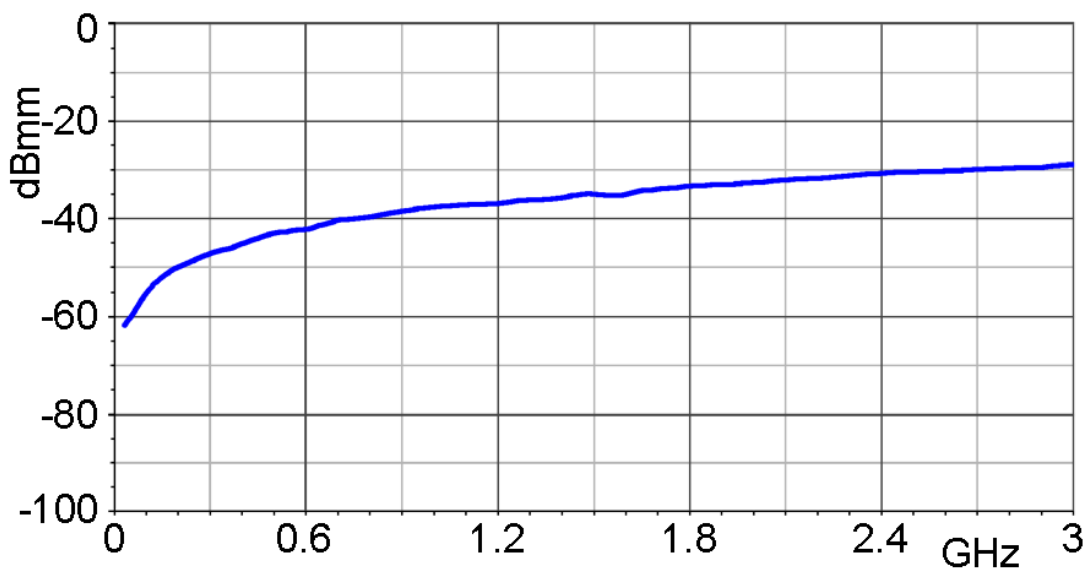


# RF-E 04

E-Field Probe 30 MHz up to 3 GHz

E- field correction curve [dB $\mu$ V/mm] / [dB $\mu$ V]

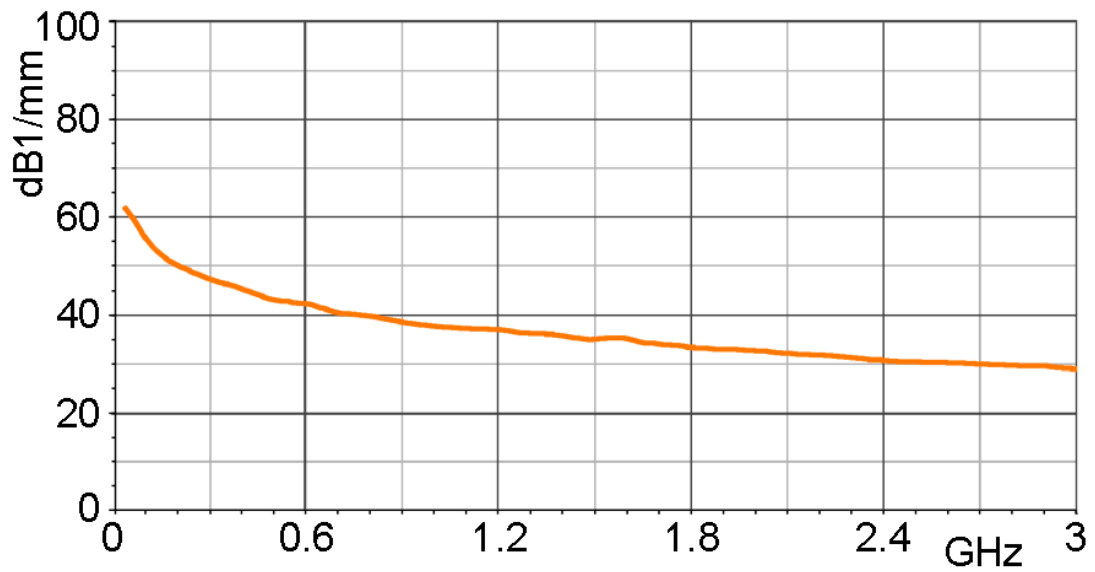

Measuring principles

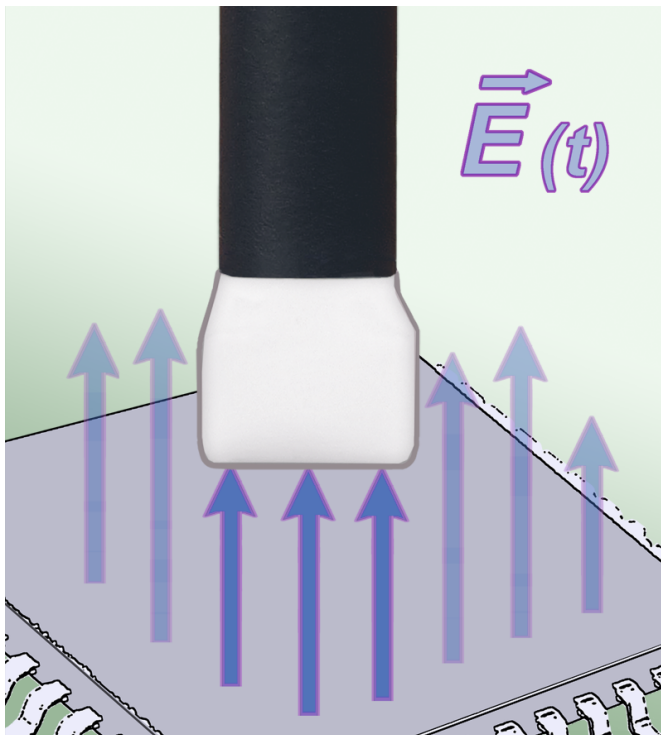

# RF-E 04

E-Field Probe 30 MHz up to 3 GHz

Probe head

