

# OSE 150-1 set

Optical Fiber Probe 1-channel, 50 Mbps



## Short description

The OSE 150-1 set is used to transmit digital signals from a disturbed device under test (EFT/burst interference). The set consists of one sensor which detects logical signals and transforms them into optical signals. The light signals are transmitted to the optical receiver via a fiber optical cable. The receiver transforms them into digital electric signals. These can be visualized with an oscilloscope or can be used for the control of other devices.

The light signals are transmitted to the optical receiver via a fiber optical cable. The system is suitable for signal monitoring from an anechoic chamber, a shielded RF chamber or in an EMC test lab. The optical transmission system allows EMC-optimizing of hard- and software, because disturbed signals can be easily detected.

## Scope of delivery

- 1x OE 150, Optical Receiver
- 1x S25, Optical Sensor (50 Mbps)
- 1x LWL Ø 2.2 mm 1.5 m, Optical Fiber Single 1.5 m
- 1x NT FRI EU, Power Supply Unit
- 1x OSE 150-1 acc, Accessories
- 1x OSE 150-1 case, System Case
- 1x Digital m, OSE User Manual


# OSE 150-1 set

Optical Fiber Probe 1-channel, 50 Mbps

## Technical parameters

<b>OE 150 Optical Receiver</b>	
Transmission range	DC ... 50 Mbps
Optical fibre connector	Ø 2.2 mm
Supply voltage	12 V / 100 mA
Optical fibre length	1 m - 20 m
Connector - output	BNC-Stecker, 5 V HCMOS
<b>S25 Optical Sensor</b>	
Transmission range	DC ... 50 Mbps
Optical fibre connector	Ø 2.2 mm
Supply voltage	3 V ... 5 V
Current input	30 mA


## Application with two OSE 150-1 sets and shielding tent

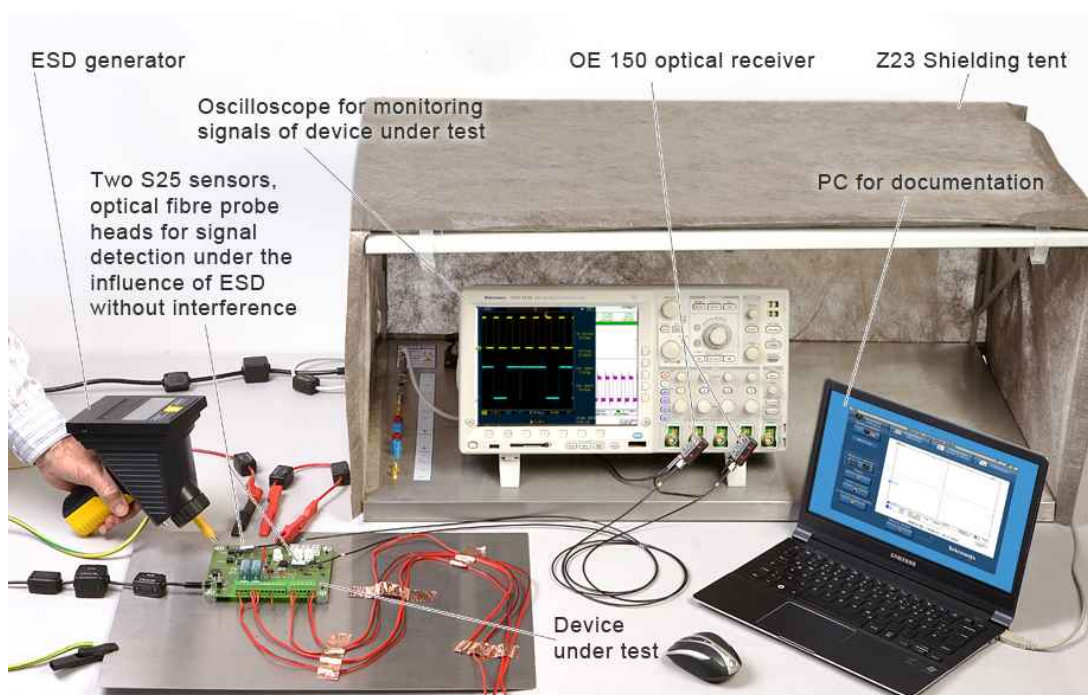

# OSE 150-1 set

Optical Fiber Probe 1-channel, 50 Mbps

## Application with two OSE 150-1 sets and SGZ 21

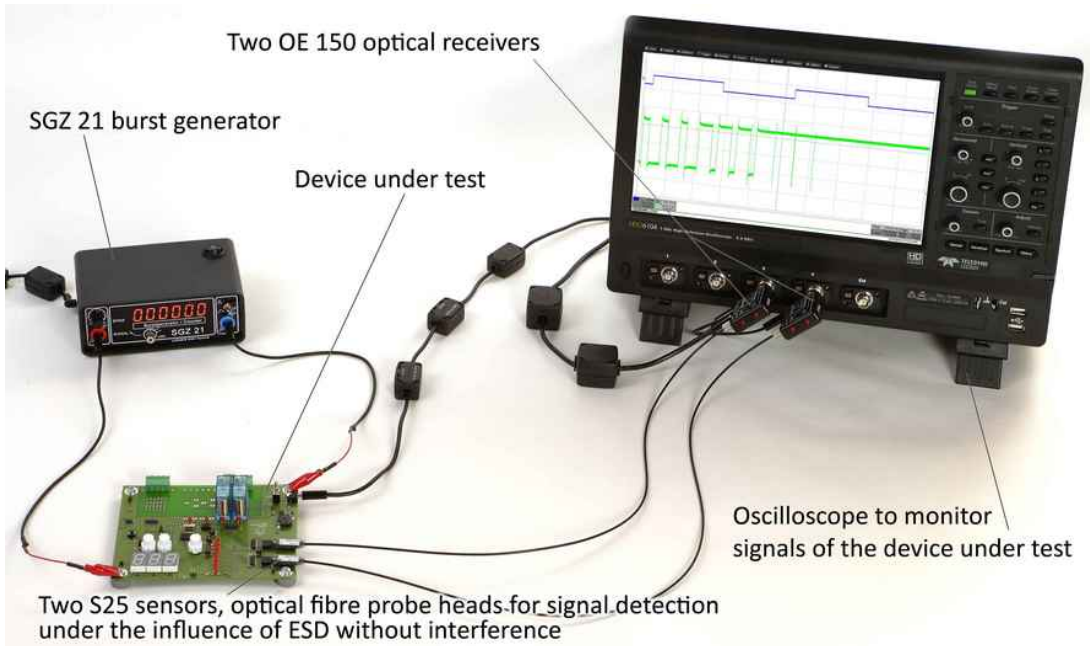

## Application with optical sensor S25



# OSE 150-1 set

Optical Fiber Probe 1-channel, 50 Mbps

Scope of delivery OSE 150-1 set

