

P503 set

RF Power Injection IEC 62132-4 up to 1 GHz



Short description

The P503 probe set is used for conducted measurements of immunity according to IEC 62132-4. The gained knowledge of immunity parameters allows the IC optimization as well as the definition of the application requirements.

Scope of delivery


- 1x P503, DPI Coupling Network up to 1 GHz, 50 V
- 1x SMA-SMA 1 m ds, SMA-SMA Double-Shielded Measurement Cable
- 2x SMA-SMB 1 m ds, SMA-SMB Double-Shielded Measurement Cable
- 1x NT FRI EU, Power Supply Unit
- 1x P500 case, System Case
- 1x P500 m, P500 Set User Manual

P503 set


RF Power Injection IEC 62132-4 up to 1 GHz



Measurement set-up with P503 probe

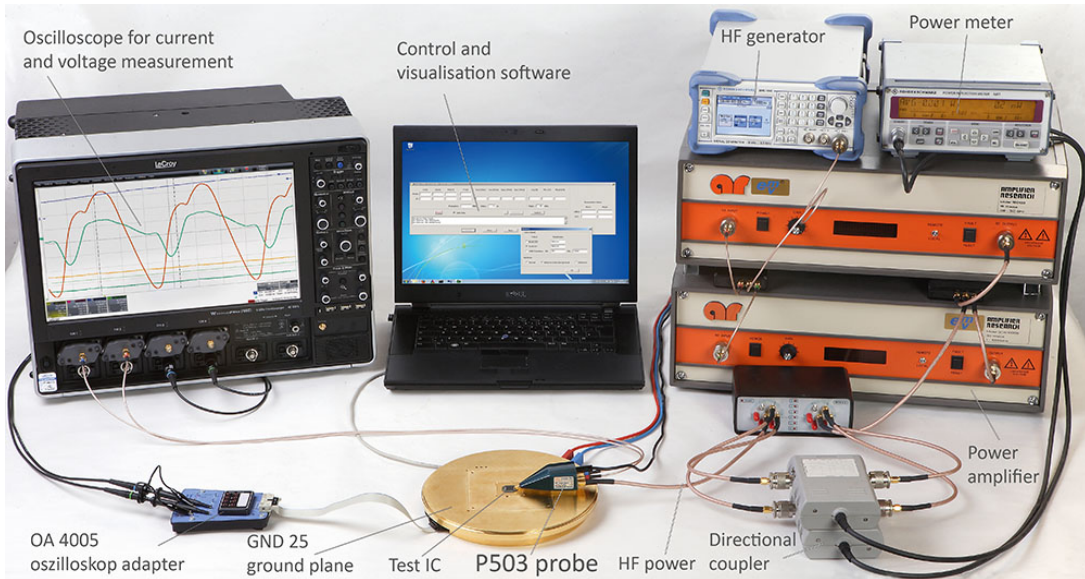

Schematic measurement set up with P500

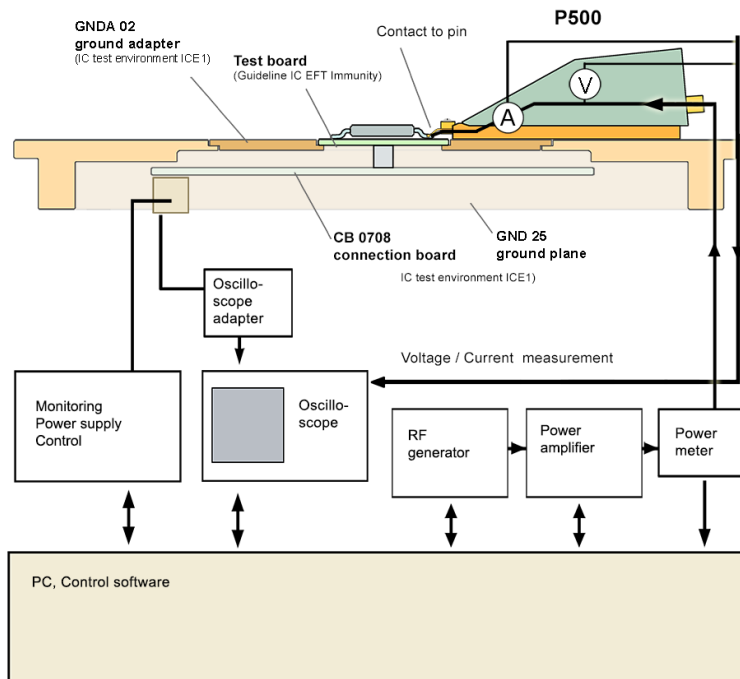

P503 set

RF Power Injection IEC 62132-4 up to 1 GHz

Scope of delivery P503 set

