


### Short description

The field source is suitable for pulsing planar or line shaped weak points in the range from 5 to 10 cm. It ranges between the field source ES 02 and ES 00. ES 01 can also be used for coupling disturbance current into assemblies.

### Measuring principles

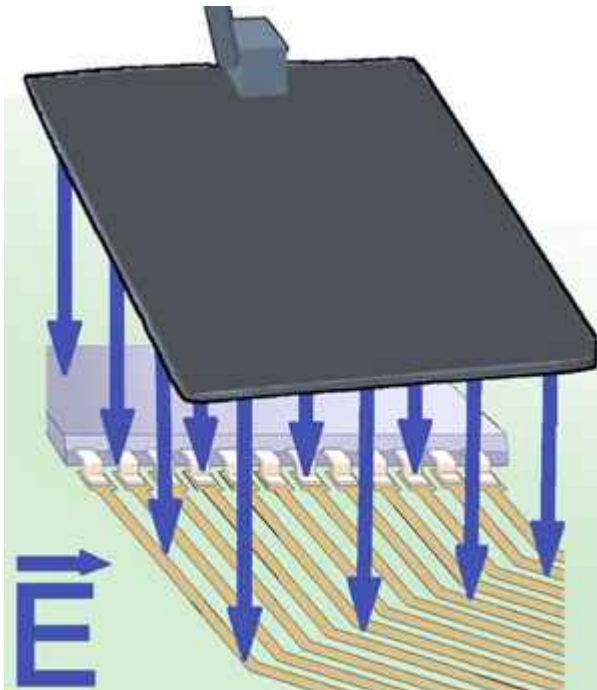

# ES 01

E-Field Source

## Application ES01

